




# Rowa™ Vmax 320

## Technical data

Dimensions	Width	3.23 m		
	Height	2.02 – 3.02 m (in 5 cm intervals)		
	Length	3.58 – 5.98 m (in 48 cm intervals)		
Sound level	Average emissions sound pressure level	49,1 dB (A)		
Possible locations	Ground floor, basement, upper floor			
Input and output times	Input	Approx. 3 seconds (Direct availability for over-the-counter sales)		
	Output	Approx. 8 – 16 seconds (up to 9 packs possible at the same time)		
Storable package sizes	Square packages	Min. package size (D × W × H)	35 × 15 × 15 mm	
		Max. package size (D × W × H)	230 × 140 × 145 mm	
		Weight	5 – 1,000 g	
	Round packages	Min. package size	Ø 45 mm, height: 15 mm	
		Max. package size	Ø 140 mm, height: 145 mm	
		Weight	5 – 800 g	
Barcodes	Identification and reading of PZN, PZN8, EAN, and 2D barcodes			
Electrical Parameter	8 A, 230 V, 50/60 Hz			
Power consumption	In operation	650 W with one picking head		
	In standby mode	348 W with one picking head		
Safety	System protection thanks to uninterrupted power supply (UPS), backup computer, remote monitoring			
Options	2 <sup>nd</sup> input belt	Rowa™ Label (labeling)		
	Rowa™ system backup	Rowa™ iProLog (integrated fully automatic input)		
	Rowa™ cleaning module	Rowa™ ProLog external (fully automatic input)		
	Rowa™ refrigerated unit (height 2.300, 2.900 mm)			
Conveyor technology	Conveyor belt, servo controlled lift, spiral chute with Ø 400 mm, possible to connect up pneumatic tube transport			
Colors	White (RAL 9016), anthracite (RAL Design 000-25-00)			

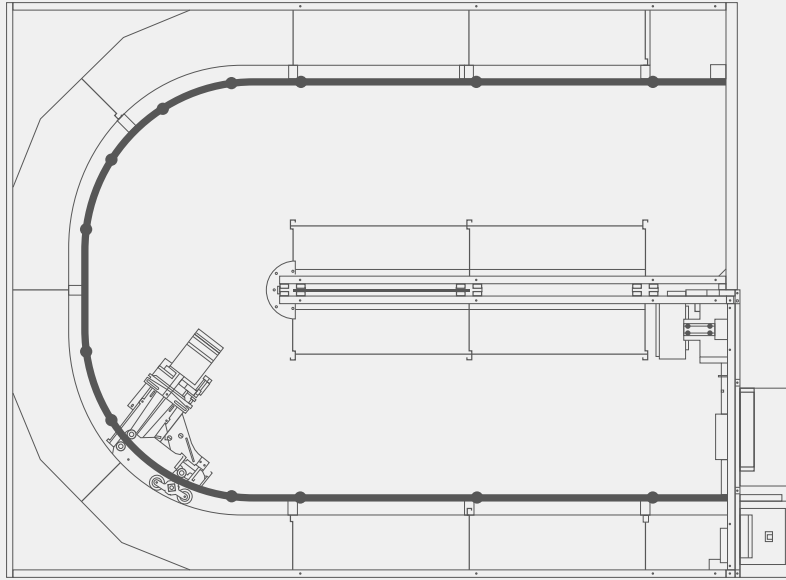

**Rowa™ Vmax 320**  
ideal for square surfaces

Becton Dickinson Rowa Germany GmbH, Rowastraße, D-53539 Kelberg  
+49 2692 92 06 0 tel, +49 2692 92 06 1299 fax

[bd.com/rowa](http://bd.com/rowa)



BD, the BD Logo and Rowa are trademarks of Becton, Dickinson and Company or its affiliates.  
All other trademarks are the property of their respective owners. © 2020 BD. All rights reserved. Nov-2020, 0000MS07486 iss1